

CONSTRUCTION PERMIT
For
BUILDING SEWERS

This is an application for permission to construct or replace a Building Sewer (Building or Street Lateral) in the Village of Clyde. The fees for new sewer services are: \$300 (April 1 – November 30) or \$500 plus all costs (December 1 – March 31). The fee for *replacement* of a building sewer is \$5.00

See definitions on Page 2

Property Location: _____

Property Owner: _____

Owner Address: _____

Contractor Performing Work: _____

Contact Phone Number: _____

Check all that apply

Type of facility: Residential Non-Residential

If non-residential, describe: _____

Type(s) of work: Building Lateral Street Lateral

Type of Building Sewer: Sanitary Storm Combined

This work is: New Replacement

Materials to be used (describe): _____

Pipe size(s): _____

The minimum internal diameter of any building sewer shall be 4 inches, and trenching, materials and connections shall conform to the Plumbing Code of New York State.

SPECIAL NOTES:

1. Building (house) traps shall be prohibited, except where specifically required by the Superintendent.
2. Additional interceptors and separators may be required.

ATTACHMENTS TO BE INCLUDED WITH APPLICATION

Attach a sketch showing the location of the work. Show property lines, driveways and street lines. Indicate locations of cleanouts.

THE APPLICANT, HIS / HER AGENTS, EMPLOYEES, OFFICERS AND ASSIGNS ASSUME ALL RESPONSIBILITY AND LIABILITY FOR ANY INJURY TO PERSONS OR DAMAGE TO PUBLIC OR PRIVATE PROPERTY CAUSED DIRECTLY OR INDIRECTLY, BY THE PERFORMANCE OF APPROVED WORK.

By signing below, I certify that the above information is true and correct, and that my project will adhere to all State and Local laws, codes, rules and regulations. I further agree to abide by all conditions that may be imposed with the approval of this application.


X
Property Owner or Authorized Agent

_____/_____/_____
Date

BEFORE YOU DIG!
CALL "DIG SAFELY NEW YORK" AT 1-800-962-7962

DEFINITIONS

- BUILDING DRAIN:** That part of the lowest piping of a drainage system in a building, extending 30 inches beyond the wall of the building.
- BUILDING LATERAL:** That portion of the building sewer located between the building drain and the street lateral.
- BUILDING SEWER:** That part of the drainage system that extends from the building drain to the public sewer.
- STREET LATERAL:** That portion of the building sewer from the public sewer to the property line.

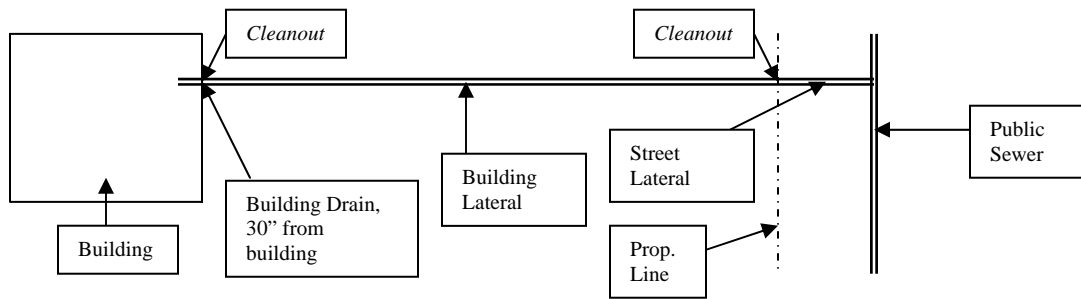

CLEANOUTS ARE REQUIRED TO BE INSTALLED AS FOLLOWS:

1. Building sewers shall be provided with cleanouts located not more than 100 feet apart, measured from the upstream entrance of the cleanout. *For building sewers 8 inches and larger, manholes shall be provided and located at each change of direction and at intervals of not more than 400 feet. Manholes and manhole covers shall be of an approved type.*
2. There shall be a cleanout near the junction of the building drain and building sewer. The cleanout shall be either inside or outside the building wall and shall be brought up to the finished ground level or to the basement floor level.
3. A property-line cleanout shall be provided at the junction of the building and street laterals. This cleanout shall terminate in a metal box imbedded in concrete.

ALL CLEANOUTS SHALL BE 4 INCHES MINIMUM DIAMETER.

OFFICE USE ONLY

APPROVED BY: X

_____/_____/_____
Date